

Special sash lock

2002

2002 sash lock package

ASSA ABLOY

Application:

For external doors on houses. Allows free escape in a fire, but if the building is left empty the lock will prevent intruders opening the door from inside.
Available with double cylinder and thumbturn, which is recommended for safety reasons. May also be fitted with a single external cylinder.
Supplied as standard with striking plate.
Cylinder and accessories bolt through lockcase for added strength.
Key can be removed in locked or unlocked position.
For finishes and dimensions see Lockcases Information appendix.
When ordering please specify hand and door thickness.


Specification:

Hardened steel hookbolt thrown 23.5mm by 360° turn of key or thumbturn. Latchbolt reversible without opening lockcase.
Available with 50mm backset only.

Finish:

Product has been successfully type-tested for conformity to BS EN 12209.
Regular audit testing is undertaken.

Technical Design:

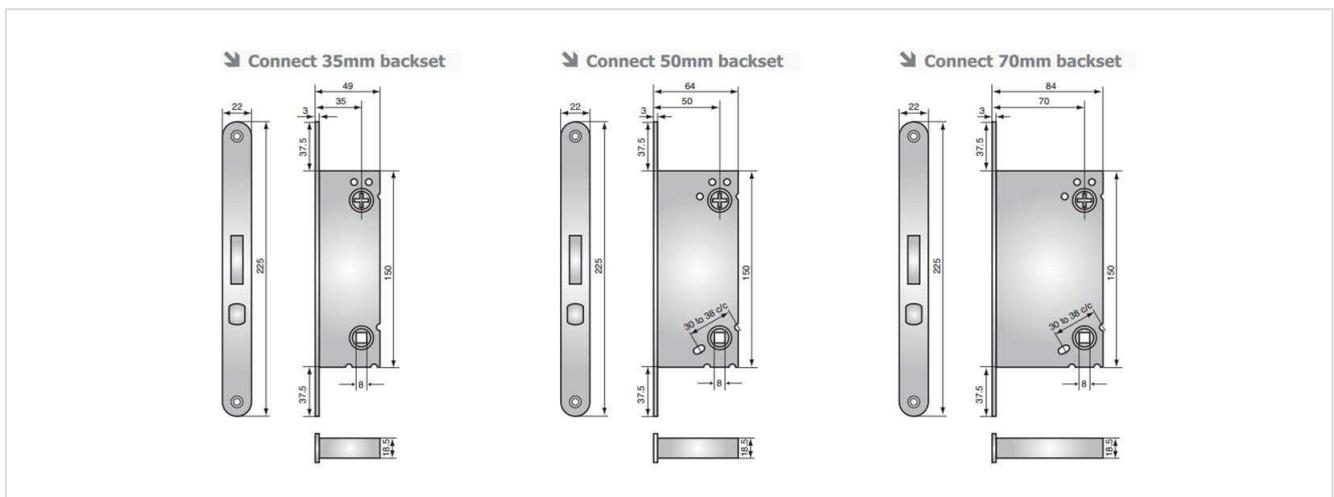

Variants:

Code	Description
LS35760216357	CONNECT 2002/50 (WITH STRIKE)

