

Deadlatches

Adams Rite 4720ANSI

Round Cylinder Deadlatch

Application:

The Adams Rite 4720ANSI is for use in hollow metal or wooden doors and offers flexible traffic control and a good level of security.


When used in emergency exit applications with a 4591 Paddle Handle the 8360 ramped jaw strike must be fitted to conform with BS EN179:2008

Specification:


<ul style="list-style-type: none">• Is interchangeable without stile modification with the MS® 1850SNSI Deadlock.• It is often used in conjunction with the 7100/7400 series Electric Strikes to provide remote access control.	<ul style="list-style-type: none">• Accepts any standard mortice cylinder, thumbturn (both with MS® cam) or 4591 Paddle handle (with 4580 cam plug).• Designed for use on timber and steel doors.• Independantly tested to 1 million cycles
--	---

Finish:

Round Cylinders ~ MS®4043 Cylinder Guard ~ Round Thumbturns
4565 Thumbturn ~ 4568 Lever Handle ~ 4591 Paddle Handle
~ 4590 Timber Mounting Plate ~ 8360 Ramp Jaw Strikes ~ 7100/7400 Series Electric Strikes

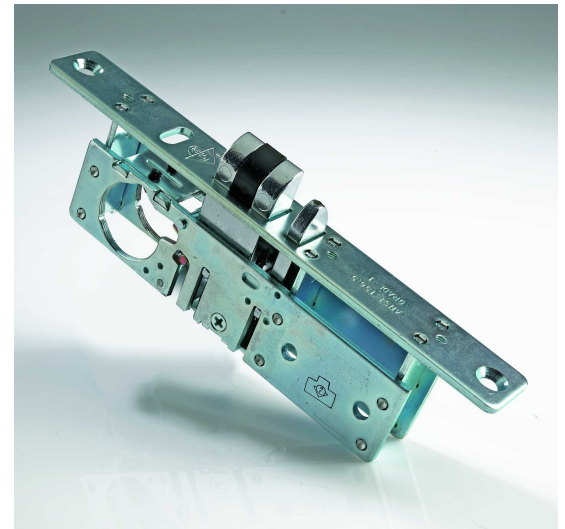

Standards:



Overall Case Size:	202mm x 31.7mm x 4mm. Steel with corrosion resistant plating.
Backset:	38.1mm (1 1/2").
Latch Bolt:	25.4mm x 12.7mm. ZA-27 Zinc, Chrome Plated, Hardened Steel Internal Pins, plus Anti-Pick baffle.
Latch Throw:	12.7mm.
Auxiliary Bolt:	ZA-27 Zinc, Chrome Plated with Hardened Steel Internal Pins.
Cylinder:	Any standard 29.4mm (1 5/32") Mortice Cylinder or Thumbturn with MS® cam.
Operation:	Turn key/thumbturn or handle to retract latch bolt.
Door Gap:	3 - 5mm.
Forend:	Steel, with aluminium faceplate..

Variants:

Code	Description
24-4720-001-628	4720 ANSI F.PLATE FLAT, SAA
4720-401-5	4720 ANSI ROUND CYL D.LATCH FOR TIMBER AND METAL DOORS, LH
4720-401-6	4720 ANSI ROUND CYL D.LATCH FOR TIMBER AND METAL DOORS, RH