


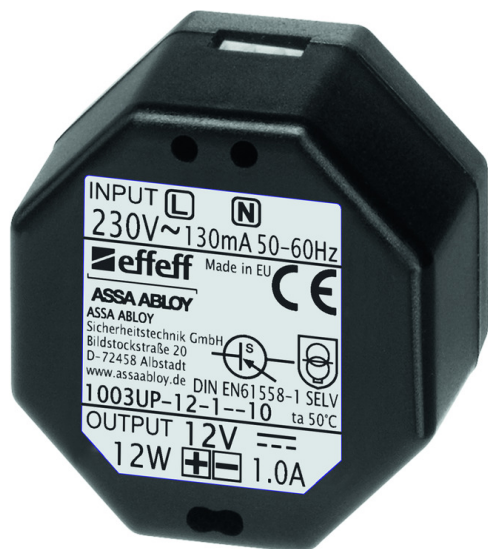

Product description

These stabilised power supply units are used for access control, escape route systems and electric strike systems where a low-noise locking component is required.

Note

- Two different power supply units and a casing are available for surface or flush mounting.
- Flush-mounted

Accessories/Individual parts

- Power supply units For 1003UPxx; dimensions: 80 x 41 x 125 mm (Order number: 7460-----00)

Technical data

Output voltage	12 V DC, stabilised
Input voltage	230 V AC +/- 15%
Rated current consumption	1 A
Mounting method	Flush-mounted switch box
Overload protection	Electronical
Protection rating	II/Insulation protection
Operating temperature range	-20 °C to +40 °C
Length	54,5 mm
Height	50,8 mm
Color	Black
Class of protection	IP 20
Material housing	plastic
Width	32 mm

Article number	1003UP-12-1--10
EAN	4042203642829