# Rim Locks - Standard Security 1026 / L1026

# **Narrow Stile Cylinder Night Latch**



#### **Application:**

- For timber doors from 35-60mm thick, hinged on the left or right and opening inwards only
- · Concealed fixing
- Not recommended for glass panelled doors
- Also suitable for steel and composite doors special fixings required


### **Specification:**

- The bolt is withdrawn by key outside and handle inside
- The bolt may be held in the locked or in the withdrawn position by operating the snib
- Backset: 50mmCase & Keep: Zinc
- · Latch Bolt: Anodised Brass finish
- Handle: Zinc, finished to match case and keep material
- Outside Cylinder: Brass, 5 pin tumbler mechanism
- Inside Cylinder: n/a
- Keying Groups: May be supplied to pass, differ & master keyed. Supplied with 2 steel nickel plated keys as standard
- To pass products order JP1X1 cylinder separately
- Master keyed products supplied with nickel silver keys order JM1X1 cylinder separately
- Key Blank Number: KB8-NP
- Available Boxed or Visi Packed

#### Finish:

- CG Champagne Gold
- EB Enamel Brass
- SC Satin Chrome
- WE White Enamel
- PL Polished Brass
- CH Chrome

## **Technical Design:**

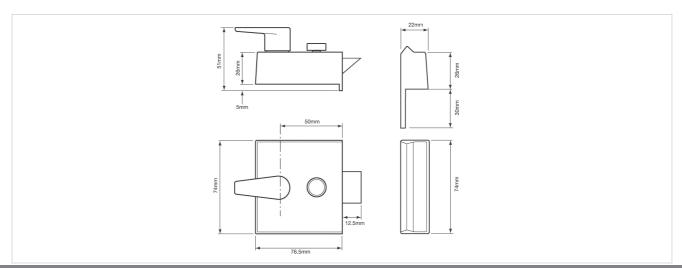









# Rim Locks - Standard Security 1026 / L1026 Narrow Stile Cylinder Night Latch



#### **Variants:**

Code	Description
J1026-WE-PL-2K	Standard Security Rim Lock
J1026-WE-SC-2K	Standard Security Rim Lock
JL1026-CH	Standard Security Rim Lock - Case Only
JL1026-CG	Standard Security Rim Lock - Case Only
JL1026-EB	Standard Security Rim Lock - Case Only
JL1026-SC	Standard Security Rim Lock - Case Only
JL1026-WE	Standard Security Rim Lock - Case Only