# **Aluminium Door Furniture Accessories**

8060

## Flush Bolt - 150mm to 450mm



# **Application:**

- For securing the passive leaf of a pair of doors
- Standard installation requires two flushbolts, morticed into the top and bottom of the door for added security and to prevent the door from warping
- · Suitable for use on swing or sliding doors



# **Specification:**

- Sprung lever action that flicks the bolt up and down
- Flush installation discrete, clean and neat
- Radiused corners for simple door preparation and improved styling
- Supplied with fixings for timber doors
- Supplied with a flat locking plate
- Radiused chamfered trigger for smooth edge on finger
- Material: Aluminium
- Width: 20.5mm
- Length: 150mm, 200mm, 300mm and 450mm
- Depth: 22.5mm
- Bolt Projection: 15mm
- Available in SS, PL, PS, PA and SA finishes


#### Standards:

- Durability 10,000 cycles
- Corrosion 96 hours resistance
- Security 100N side load
- Security 1 minute resistance to side load (4,500N)

#### Finish:

- SS Satin Stainless Steel finish
- PL Polished Brass finish
- PS Polished Stainless Steel finish
- PA Polished Aluminium
- SA Satin Aluminium

## **Technical Design:**

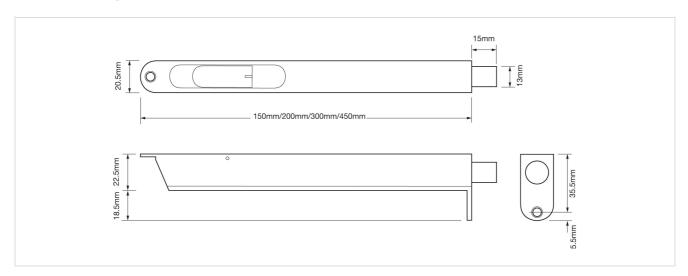

# **Aluminium Door Furniture Accessories**

8060

# Flush Bolt - 150mm to 450mm



### **Variants:**

Code	Description
J8060-150-SS	FLUSH BOLT SATIN ST. 150MM
J8060-200-SA	FLUSH BOLT SATIN AL. 200MM
J8060-200-SS	FLUSH BOLT SATIN ST. 200MM
J8060-300-SA	FLUSH BOLT SATIN AL. 300MM
J8060-300-SS	FLUSH BOLT SATIN ST. 300MM
J8060-450-SA	FLUSH BOLT SATIN AL. 450MM
J8060-450-SS	FLUSH BOLT SATIN ST. 450MM