


# RF-Smart PSU

## 2 Amp, 12 Volt Power Supply (with RF Expander capability)

The **RF-SmartPSU** power supply is designed to the EN 50131-6 standard and delivers 2A at a nominal 12Vdc. It can be installed either as a standalone unit or integrated to HKC SecureWave SW-10270 Panel via an RF (868MHz) link or alternatively, via the keypad bus.

The **RF-SmartPSU** also has full RF-Expander capability.

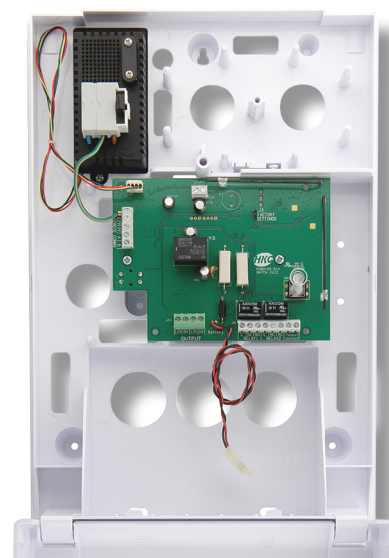

**SecureWave**  
868MHz Radio

### Features:

- Delivers 2A current
- Compatible with **SW-10270** Panel
- Complete **RF-Expander** functionality
- Comms via **SecureWave** wireless technology
- or comms via panel's keypad bus
- 2 programmable changeover relay outputs
- Fuse monitoring
- Tamper monitoring
- Automatic battery test
- Engineer battery test
- Battery current monitoring
- 7Ah battery
- Mains fail detect
- System overview facility
- Buzzer to locate
- Polycarbonate box with hinged door
- Mains: 230Vac (205 - 255Vac), 50Hz
- Output: 13.6Vdc (13.3 - 13.9Vdc)
- Max. ripple: 450mV peak to peak
- Temperature: -10 to +50°C
- Weight: 1,300g
- Size: 360mm x 236mm x 90mm
- EN 50131-6 Type A, Grade 2, Class II

Irish Technical Support: 01 4567 007

UK Technical Support: 01706 838 746

An ASSA ABLOY Group brand

Experience a safer  
and more open world