


RF-Optex

Optex Module for External PIRs

The **RF-Optex** module provides power to an outdoor PIR. The wiring harnesses to handle the Alarm/Tamper signals from the PIR are integrated in the PIR hardware and they plug onto the **RF-Optex** module.

The **RF-Optex** module then relays the Alarm/Tamper signals wirelessly to the HKC SW-10270 Control Panel using **SecureWave** technology.

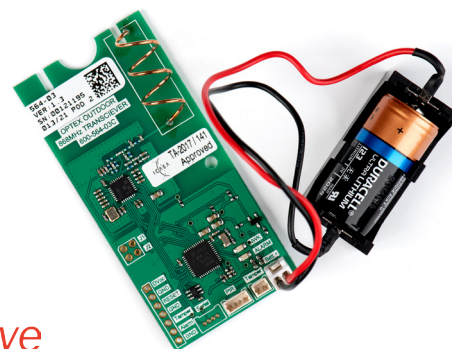

SecureWave
868MHz Radio

Features:

- Suitable for **Optex** PIRs:
 - VXS-RDAM-X8
 - VXS-RAM
 - WXI-R
 - BXS-RAM(W)
 - FTN-RAM
- Compatible with **SW-10270** Panel
- Long battery life, typically 3 years
- 3Vdc nominal / 1,400mAh - DL123A
- Current: 11µA (standby) 60mA (peak)
- RF range >400m (line of sight)
- Temperature: -20 to +60°C
- Weight: 40g (inc. battery & Velcro)
- Size: 37mm x 78mm x 14mm
- EN 50131-5-3, Grade 2, Class II

Irish Technical Support: 01 4567 007

UK Technical Support: 01706 838 746

An ASSA ABLOY Group brand

Experience a safer
and more open world