

# Rim Locks - Security

1038 / L1038

## Standard Stile Cylinder Night Latch



### Application:

- For timber doors from 35-60mm thick, hinged on the left or right and opening inwards only
- Suitable for glass panelled doors
- Not recommended for single door entry residencies
- Concealed fixing
- Also suitable for steel and composite doors - special fixings required

### Specification:

- The bolt is withdrawn by key outside and handle inside
- The bolt may be held in the locked or in the withdrawn position by operating the snib
- When the door is closed the bolt is automatically locked against end pressure by the anti-thrust slide
- Turning key a full revolution anti-clockwise deadlocks handle
- Backset: 60mm
- Case & Keep: Zinc
- Latch Bolt: Anodised Brass finish
- Handle: Zinc, finished to match case and keep material
- Outside Cylinder: Brass, 5 pin tumbler mechanism
- Inside Cylinder: n/a
- Keying Groups: May be supplied to pass, differ & master keyed. Supplied with 2 steel nickel plated keys as standard
- To pass product - order JP1X1 cylinder separately
- Master keyed products supplied with nickel silver keys - order JM1X1 cylinder separately
- Key Blank Number: KB8-NP
- Available Boxed or Visi Packed

### Finish:

- EB - Enamelled Brass
- WE - White Enamel
- SC - Satin Chrome



# Rim Locks - Security


1038 / L1038

## Standard Stile Cylinder Night Latch



ASSA ABLOY

### Technical Design:

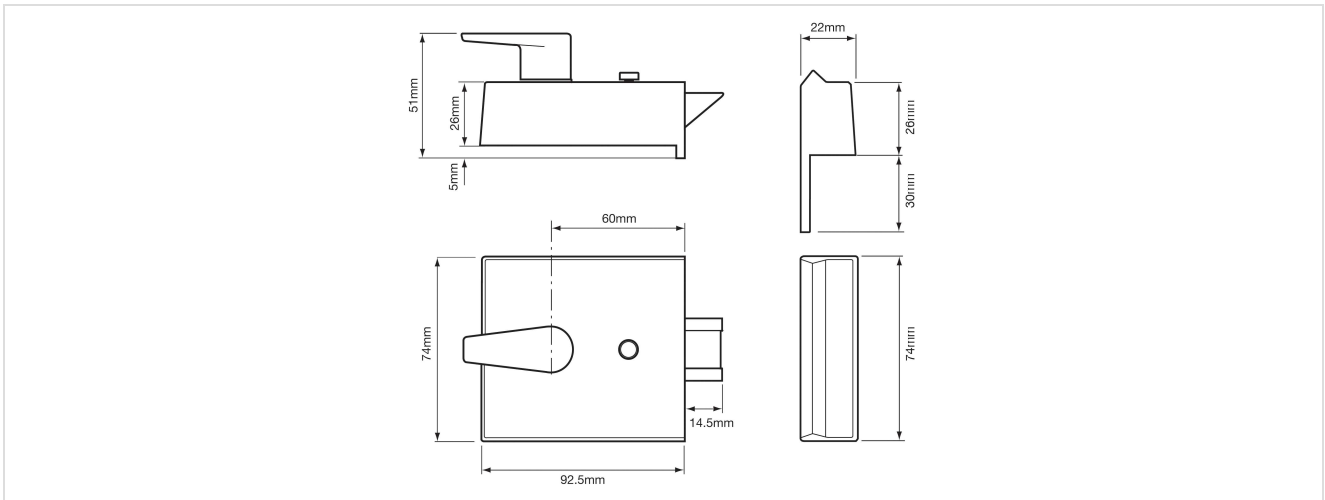

### Variants:

Code	Description
JL1038-EB	Security Rim Lock - Case Only
JL1038-SC	Security Rim Lock - Case Only
JL1038-WE	Security Rim Lock - Case Only