

Performance you can trust



ASSA ABLOY



CE24V

Variable size rack and pinion door closer

A universal fitting and fully adjustable door closer

CE24V Variable size rack and pinion door closer



The CE24V is CE marked for use in all three of the main applications. It is one of the easiest ways to retrofit fire doors that are using a Briton 1100 Series unit. Each door can be tailored to close as required using just two tools.

Easy to adjust for perfect control, the CE24V can be adjusted for power, closing speed and latching force - simply turn the valve controls to suit.

The CE24V features a fully tested back check which cuts in when a fire door is opened to 75°, preventing damage to nearby walls or furniture and helping to prevent injury. CE24V is independently certified for use on fire doors and is CE Marked to EN 1154 with variable power EN 2-4 (EN 1634 up to 120 mins for timber).



Range benefits

- Retro-fits Briton 1100
- Suitable for fig.1, fig.61 and fig.66 installation
- Adjustable power size 2-4
- Adjustable size, closing speed and latching
- Fully tested back check to reduce risk of damage to surrounding surfaces and users
- Fully adjustable armset to ensure every CE24V you install works perfectly
- Variable size 2-4 for smooth, effortless closing
- Maximum door width 1100mm (size 4)
- CE Marked to EN 1154 as variable power 2-4
- Fire rated for timber (FD120) doors
- Silver finish
- 10 year guarantee

Ideal applications


Residential living, nurseries, schools, care homes, hospitals.




certifire




EN 1154 Size	Max Door Width	Max Door Weight
1	750mm	20kg
2	850mm	40kg
3	950mm	60kg
4	1100mm	80kg
5	1250mm	100kg
6	1400mm	120kg

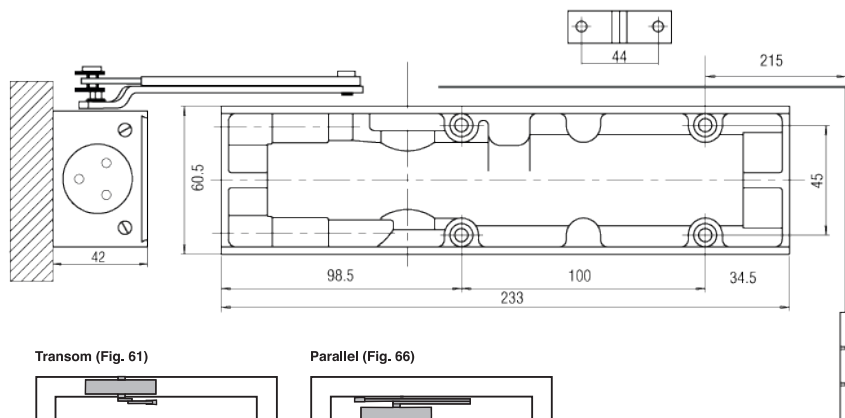


Regular (Fig. 1)

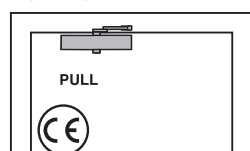

Transom (Fig. 61)



Parallel (Fig. 66)



Description	Pack type	Product code
Adjustable size 2-4 door closer	Boxed	J-CE24V-SIL



0845 223 2124



uniononline.co.uk